


LEVISO LIGHT

- Subtly textured dimout fabric with a soft finished form
- Standard 100 by Oeko-Tex® certified, free from harmful substances
- Washable up to 60°
- Proven acoustic properties

APPLICATIONS

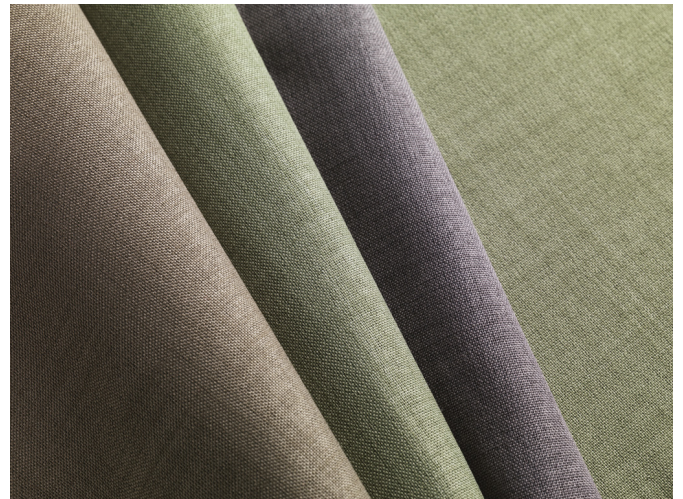

FABRIC PROPERTIES

 Dimout

 Polyester

 300 g/m²

 0.62 mm

 ←max.→ 290 cm

 295 cm

FEATURES / TECHNICAL PROPERTIES

 4-5

 Alpha-w = 0.80

 Flame retardant

 Fabric must be turned

 Fabric must be turned

 Oeko-Tex

 Special colours from 400 m

WASHING INSTRUCTIONS

     
 -0.5% -1% -0.25%

FLAME RETARDANT

Class 1 (EN 13773)
 M1 (NF P 92-503/5/7)
 Type B (BS 5867-2)



Leviso Light
OPTICAL AND SOLAR COEFFICIENTS ($\pm 5\%$, DIN EN 410)

Colour	T_V	T_S	R_S	A_S	F_C	g_{tot}
1	0.6	1.0	59.8	39.2	0.54	0.39
2	0.6	1.0	59.8	39.2	0.54	0.39
3	0.6	1.0	59.8	39.2	0.54	0.39
8	0.6	1.0	59.8	39.2	0.54	0.39
9	0.0	0.8	44.5	54.7	0.64	0.46
11	0.0	0.8	44.5	54.7	0.64	0.46
12	0.0	0.8	44.5	54.7	0.64	0.46
14	0.0	0.9	37.1	62.0	0.68	0.49
17	0.0	0.8	44.5	54.7	0.64	0.46
18	0.0	0.9	37.1	62.0	0.68	0.49
19	0.0	0.9	37.1	62.0	0.68	0.49
23	0.0	0.9	37.1	62.0	0.68	0.49
25	0.0	0.9	37.1	62.0	0.68	0.49
27	0.6	1.0	59.8	39.2	0.54	0.39
28	0.0	0.9	37.1	62.0	0.68	0.49
29	0.0	0.9	34.0	65.1	0.70	0.51
30	0.0	0.9	34.0	65.1	0.70	0.51
31	0.0	0.9	37.1	62.0	0.68	0.49
32	0.0	0.8	44.5	54.7	0.64	0.46
33	0.6	1.0	59.8	39.2	0.54	0.39

T_V Visible light transmission

R_S Solar reflectance

F_C Shading factor

T_S Solar transmission

A_S Solar absorption

g_{tot} Total g-value


$F_C + g_{tot}$: Value calculated with glass: $0.72 / U_g = 1.6 \text{ W/m}^2 \text{ K}$, DIN EN 13363-1

Leviso Light

1



2



3




8



9




11



12




14



17



18



19



23



25



27




28




29



30



31



32



33

Colours shown are not binding